




- 2. The position of slotted plastic pipe and limits of treated permeable material shown are for the Type I structural section drainage system shown on Standard Plan D99A.
- 3. Other types of plugs may be substituted with the Engineer's approval.
- 4. The Type 3 cleanout and Type G vent is for use with portland cement concrete shoulders. The Type 6 structural section drainage system from Standard Plan D99A is shown. Use plastic pipe plug shown in Detail A with Type 3 cleanouts. Use vent cover shown on Standard Plan D99B with Type G vents.

STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION

EDGE DRAIN CLEANOUT AND VENT DETAILS

NO SCALE

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN D99C

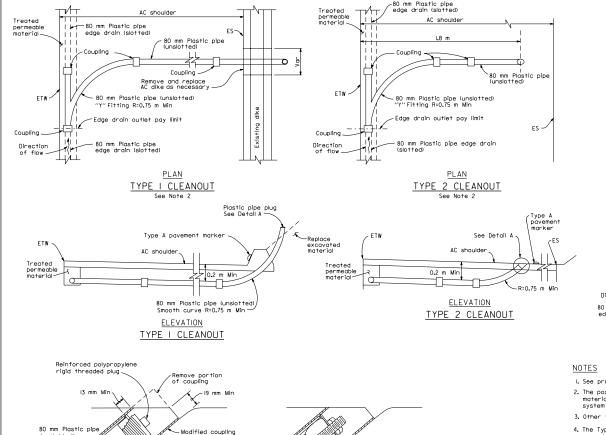

(unslotted)

Thermoplastic rubber sealing ring

> DETAIL A PLASTIC PIPE PLUG

ALTERNATIVE I

See Alternate I for modified coupling details

Expansion-type pressure plug

ALTERNATIVE 2